

Motion

move 10 steps

turn 15 degrees

turn 15 degrees

go to random position

go to x: -87 y: -12

glide 1 secs to random position

glide 1 secs to x: -87 y: -12

point in direction 90

point towards mouse-pointer

change x by 10

set x to -87

change y by 10

set y to -12

if on edge, bounce

set rotation style left-right


x position

y position

direction

Scratch	Scratch Values	Go+	Go+ Values	Note
move N steps	N = distance	step N move N	N = distance	step configurable walking animation
turnRight N degrees	N = degree	turn X changeHeading N	X = degree Left Right *TurningInfo	turn configurable turn animation turn *TurningInfo can make the sprite rotate with another sprite, similar to the effect of a tortoise carrying a monkey
turnLeft N degrees	N = degree	turn -N changeHeading -N		
go to O	O = random position mouse-pointer SpriteName	goto O	O = Random Mouse SpriteName SpriteObj	
go to x: X, y: Y	X, Y = coordinate	setXYpos X, Y	X, Y = coordinate	
glide N secs to O	N = second O = random position mouse-pointer SpriteName	glide O, N	N = second O = Random Mouse SpriteName SpriteObj	Animation effect is not implemented
glide N secs to x: X, y: Y	N = second X, Y = coordinate	glide X, Y, N	N = second X, Y = coordinate	Animation effect is not implemented
point in direction N	N = degree	turnTo N setHeading N	N = degree	turnTo configurable turn animation
point towards O	O = mouse-pointer SpriteName	turnTo O	O = degree Left Right Up Down Mouse SpriteName SpriteObj	turnTo configurable turn animation
change x by Dx	Dx = coordinate	changeXpos Dx	Dx = coordinate	
set x to X	X = coordinate	setXpos X	X = coordinate	
change y by Dy	Dy = coordinate	changeYpos Dy	Dy = coordinate	
set y to Y	Y = coordinate	setYpos Y	Y = coordinate	
-		changeXYpos Dx, Dy	Dx, Dy = coordinate	
if on edge, bounce		bounceOffEdge		
set rotation style S	S = left-right don't rotate all round	setRotationStyle S	S = LeftRight None Normal	Not implemented, only supports Normal
x position		xpos		
y position		ypos		
direction		heading		

Looks

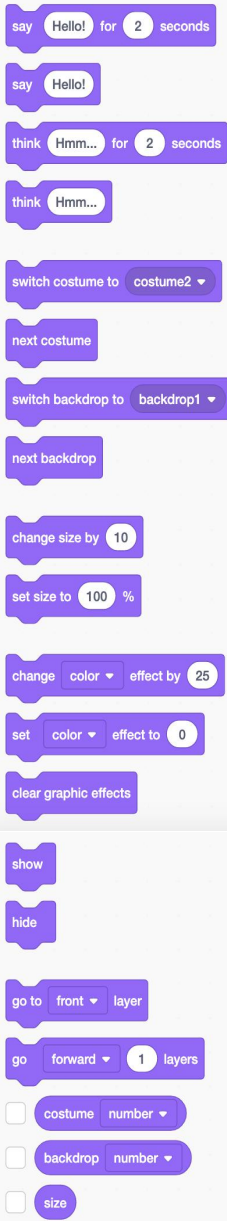

Scratch	Scratch Values	Go+	Go+ Values	Note
say V for N seconds	V = text number N = second	say V, N	V = text number ... N = second	
say V	V = text number	say V	V = text number ...	
think V for N seconds	V = text number N = second	think V, N	V = text number ... N = second	Currently equivalent to say V, N
think V	V = text number	think V	V = text number ...	Currently equivalent to say V
switch costume to N	N = CostumeName CostumeIndex	setCostume N	N = CostumeName CostumeIndex Next Prev	
next costume		nextCostume		
-		prevCostume		
-		animate Name		Animate can play a frame-animation
switch backdrop to N	N = CostumeName CostumeIndex next backdrop previous backdrop random backdrop	startScene N startScene N, Wait	Wait = true false N = CostumeName CostumeIndex Next Prev	Random: * Scratch 3.0 added this parameter
next backdrop		nextScene nextScene Wait	Wait = true false	
switch backdrop to N	N = previous backdrop	prevScene prevScene Wait	Wait = true false	
change size by N %	N = scale percent	changeSize N/100.0		Scratch uses percentages
set size to N %	N = scale percent	setSize N/100.0		Scratch uses percentages
change G effect by N	N = percent G = color fisheye whirl pixelate mosaic brightness ghost	changeEffect G, N		Not implemented, high priority is color and brightness effects
set G effect to N	N = percent G = color fisheye whirl pixelate mosaic brightness ghost	setEffect G, N		Not implemented, high priority is color and brightness effects
clear graphic effects		clearGraphEffects		Not implemented
show		show		
hide		hide		
go to front layer		gotoFront		
go to back layer		gotoBack		
go forward N layers	N = integer	goBackLayers N		
go backward N layers	N = integer	goBackLayers -N		
costume number		costumeIndex		
costume name		costumeName		
backdrop number		sceneIndex		
backdrop name		sceneName		
size		size * 100		Scratch uses percentages
-		visible		Whether the sprite is visible

Sound

play sound Meow until done

start sound Meow

stop all sounds

change pitch effect by 10

set pitch effect to 100

clear sound effects

change volume by -10

set volume to 100 %

volume

Music

play drum (1) Snare Drum for 0

rest for 0.25 beats

play note 60 for 0.25 beats

set instrument to (1) Piano


set tempo to 60

change tempo by 20

tempo

Scratch	Scratch Values	Go+	Go+ Values	Note
play sound S until done	S = SoundName	play S, true	S = SoundObj	
start sound S	S = SoundName	play S	S = SoundObj	
stop all sounds		stopAllSounds		
change S effect by N	N = percent S = pitch pan left/right	changeEffect S, N		Not implemented
set S effect to N	N = percent S = pitch pan left/right	setEffect S, N		Not implemented
clear sound effects		clearSoundEffect		Not implemented
change volume by N %		changeVolume N		
set volume to N %		setVolume N		
volume		volume		
Music related		-		Not implemented

Events

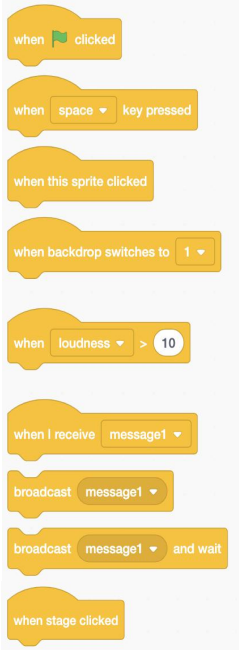

Scratch	Scratch Values	Go+	Go+ Values	Note
when flag clicked:		onStart =>		
when any key pressed:		onAnyKey key =>	key Key	
when K key pressed:		onKey K, => onKey [K1, K2, ...], => onKey [K1, K2, ...], key =>	key Key	
when this sprite clicked:		onClick =>		
when stage clicked:		onClick =>		
when backdrop switches to Name:		onScene name => onScene Name, =>	name string	
when loudness > N:		-		Not implemented
when timer > N:		-		Not implemented
when I receive Msg:		onMsg Msg, =>		
-		onMoving => onMoving mi =>	mi *MovingInfo	Triggered when the sprite is moving
-		onTurning => onTurning ti =>	ti *TurningInfo	Triggered when the sprite is turning
broadcast Msg		broadcast Msg		
broadcast Msg and wait		broadcast Msg, true		

Control



Scratch	Scratch Values	Go+	Go+ Values	Note
wait N seconds	N = second	wait N	N = second	
repeat N ... end		for range :N { ... }		
forever ... end		for { ... }		
if Cond then ... end		if Cond { ... }		
if Cond then ... else ... end		if Cond { ... } else { ... }		
wait until Cond repeat until Cond ... end		for !Cond { ... }		
stop X	X = all this script other scripts in sprite	stop X	X = All AllSprites ThisSprite ThisScript OtherScriptsInSprite	The difference between the parameters All and AllSprites: 1) All contains the stage, 2) All will stop the current script (only All and ThisScript will stop the current script, others will not)
when I start as a clone		onCloned => onCloned param =>	param interface{}	
create clone of myself		clone clone Param		
create clone of Sprite		Sprite.clone Sprite.clone Param		
delete this clone		destroy		Note: For the sprite prototype (not cloned), destroy will fail
-		die		Configurable death animation; Will call setDying to set itself as dead, and execute the death animation (if any)
-		setDying		Setting the state of death is also effective for the sprite itself (this state is quite special, although it is still visible, it can also execute the death animation, but it has not been able to touch, similar to a ghost)
-		isCloned		Whether the sprite is cloned

Sensing

touching mouse-pointer ?

touching color ?

color is touching ?

distance to mouse-pointer

ask What's your name? and wait

answer

key space pressed?

mouse down?

mouse x

mouse y

set drag mode draggable

loudness

timer

reset timer

backdrop # of Stage

current year

days since 2000

username

Scratch	Scratch Values	Go+	Go+ Values	Note
touching O	O = mouse-pointer edge SpriteName	touching O	O = Mouse Edge EdgeLeft EdgeRight EdgeTop EdgeBottom SpriteName SpriteObj	When the sprite detects that it has touched sprite O, the touched sprite O will trigger the onTouched event
-		onTouched => onTouched obj => onTouched N, => onTouched N, obj => onTouched [N1, N2, ...], => onTouched [N1, N2, ...], obj =>	N = name	N is the name of the sprite that met me, obj is the sprite object that met me
touchingColor Color	Color = color	touchingColor Color	Color = color	Not implemented
color C1 is touching C2?	C1, C2 = color	-		Not implemented
distance to O	O = mouse-pointer SpriteName	distanceTo(O)	O = Random Mouse SpriteName SpriteObj	The distance between the sprite and an object
ask Msg and wait	Msg = text number	ask Msg	Msg = text number ...	Not implemented: Both Sprite and Stage have an ask function but with different functions (Sprite uses say Msg, while Stage displays the prompt information in the input dialog box)
answer		answer		Not implemented
key K pressed?	K = key	keyPressed(K)	K = key	
mouse down?		mousePressed		
mouse x		mouseX		
mouse y		mouseY		
set drag mode X	X = draggable not draggable	-		Not implemented
loudness		-		Not implemented
timer		timer		Not implemented
reset timer		resetTimer		Not implemented
Prop of O	O = Stage SpriteName Prop(Stage) = backdrop # backdrop name volume VarName Prop(SpriteName) = x position y position direction costume # costume name size volume VarName			For Go+, no special mechanism is needed to obtain these attributes.
current T	T = year month date day of week hour minute second			Just use the Go standard library
days since 2000				Just use the Go standard library
username		username		Not implemented

Variables

Make a Variable

my variable

set my variable to 0

change my variable by 1

show variable my variable

hide variable my variable

Make a List

list

add thing to list

delete 1 of list

delete all of list

insert thing at 1 of list

replace item 1 of list with thing

item 1 of list

item # of thing in list

length of list

list contains thing?

show list list

hide list list

Scratch	Scratch Values	Go+	Go+ Values	Note
set VarName to V		VarName = V		
change VarName by V		VarName += V		
show variable VarName		showVar VarName		
hide variable VarName		hideVar VarName		
ListName		ListName.string		List type
add V to ListName		ListName.append V		
delete Idx of ListName	Idx = index	ListName.delete Idx	Idx = index All Last Random	
delete all of ListName		ListName.delete All		
insert V at Idx of ListName	Idx = index	ListName.insert Idx, V	Idx = index Last Random	
replace item Idx of ListName with V	Idx = index	ListName.set Idx, V	Idx = index Last Random	
item Idx of ListName	Idx = index	ListName.at(Idx)	Idx = index Last Random	
item # of V in ListName		-		Not implemented
length of ListName		ListName.len		
ListName contains V?		ListName.contains(V)		
show list ListName		showList ListName		
hide list ListName		hideList ListName		

Pen



Scratch	Scratch Values	Go+	Go+ Values	Note
erase all		eraseAll		This command in Scratch 2.0 is called clear
stamp		stamp		
pen down		penDown		
pen up		penUp		
set pen color to C		setPenColor C		
change pen Prop by N	Prop = color saturation brightness transparency	-		Not implemented
set pen Prop to N	Prop = color saturation brightness transparency	-		Not implemented
change pen size by N		changePenSize N		
set pen size to N		setPenSize N		